


### Full, empty and demand indicator

for any mounting position  
with reinforced blade shaft and long support tube


Signal contact	2 A / 250V AC potential-free
Type of protection	IP66 in accordance with DIN EN 60529
Maintenance	none

**A3 or A4**  
Round housing

Order code  
**DF24AnCnF2E ...**

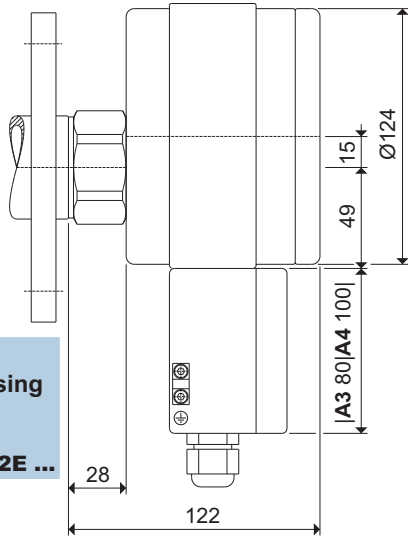

001-0116

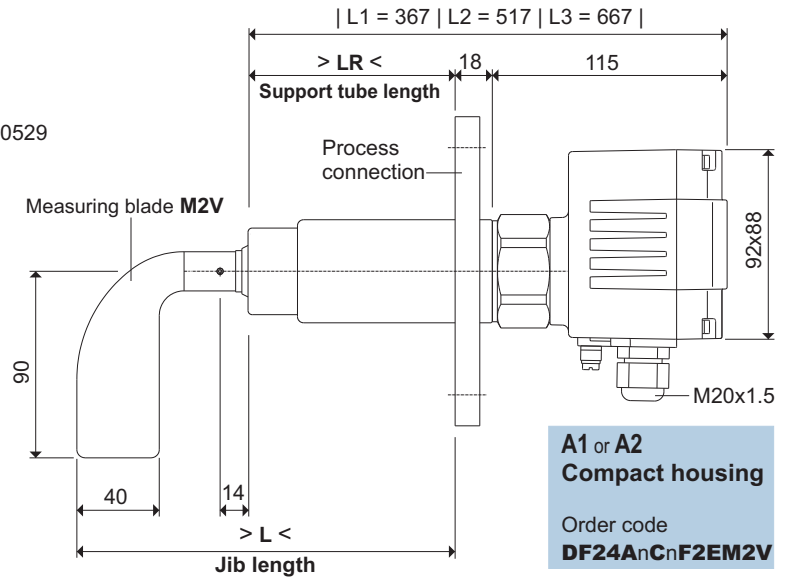

**A1 or A2**  
Compact housing


Order code  
**DF24AnCnF2EM2V**

001-0115

$$L = LF + 14 + LR$$

Standard shaft length = LF + 14

**LR**  
Support tube length

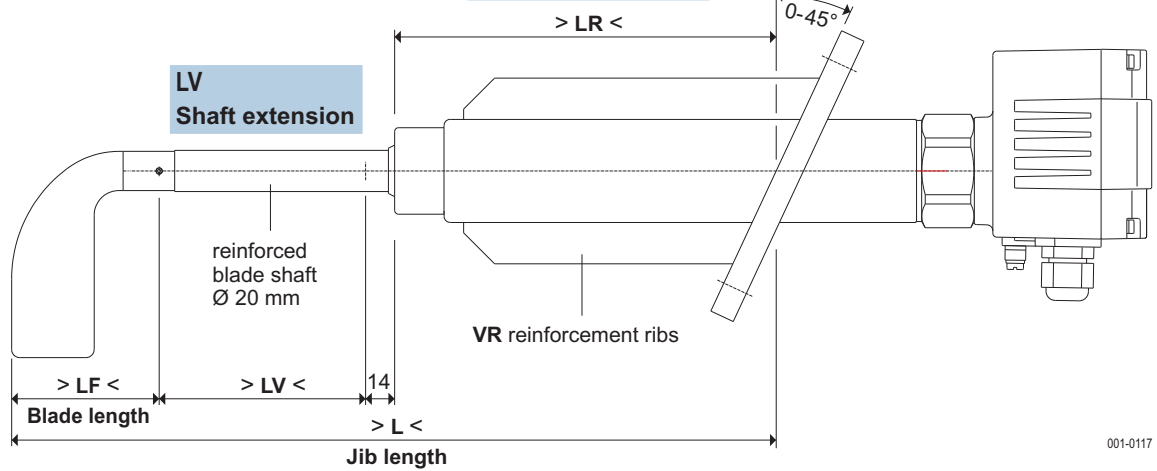


001-0117

$$L = LF + LV + 14 + LR$$

You will find further technical details  
under appliance information **DF-GI-..**

**E1 up to 150°C**  
**E2 up to 200°C**  
**E3 up to 260°C**

**E1, E2 or E3**  
Temperature decoupling bell housing  
(Extension for control head protection against overheating.)

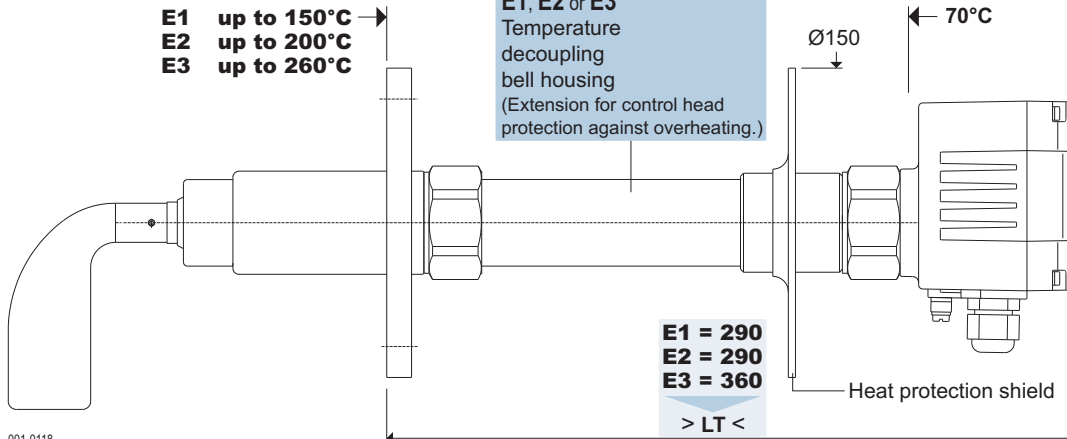

**E1 = 290**  
**E2 = 290**  
**E3 = 360**

> LT <

001-0118