

## FEATURES

- Static and dynamic applications
- Linearity 0.1% F.S.
- Integrated Amplifier optional
- IP65 optional

## APPLICATIONS

- Process control equipment
- Weighing calibration tool
- Fatigue tests benches
- Hydraulic press regulation
- Laboratory and Research

## FN3000

### Load Cell Tension and Compression

#### SPECIFICATIONS

- **Heavy duty Pan-cake load cell**
- **Standard ranges 10 kN to 1000 kN**  
[2 klbf to 200 klbf]
- **Very high stability**
- **Aluminum or Stainless steel**
- **High IP protection available**
- **High Level Output Model with Integrated Amplifier**

The **FN3000** measures tension and compression in standard ranges from 0-10 kN to 0-1000 kN. The mechanical design and gauge placement minimizes transverse effects. Depending on the range, the **FN3000** is constructed in aluminium alloy or stainless steel and is available with numerous options. It is suitable for test bench applications and used in many hostile environments and can be customized for increased protection.

With a long standing experience as a designer and manufacturer of sensors, TE CONNECTIVITY often works with customers to design or customize sensors for specific uses and testing environments.

To meet your needs we also offer extensive turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

On request, Instruction documents can be provided to ease the selection and use of our sensors and provide helpful tips.

**STANDARD RANGES**

<b>Ranges in N (FS)</b>	10k	25k	50k	100k	200k	500k	1000k
<b>Ranges in lbf (FS)</b>	2k	5k	10k	20k	40k	100k	200k
<b>Stiffness in N/m</b>	2.5x10 <sup>8</sup>	5x10 <sup>8</sup>	1x10 <sup>9</sup>	2x10 <sup>9</sup>	3x10 <sup>9</sup>	5x10 <sup>9</sup>	7x10 <sup>9</sup>
<b>Stiffness in lbf/ft</b>	1.7x10 <sup>7</sup>	3.4x10 <sup>7</sup>	6.9x10 <sup>7</sup>	1.4x10 <sup>8</sup>	2.1x10 <sup>8</sup>	3.4x10 <sup>8</sup>	4.8x10 <sup>8</sup>
<b>Material</b>	Aluminum	Stainless steel					

**PERFORMANCE SPECIFICATIONS (typical values at temperature 23±3°C)**

<b>PARAMETERS</b>	
Operating Temperature Range (OTR)	-20 to 80° C [-4 to 176° F]
Compensated Temperature Range (CTR)	0 to 60° C [32 to 140° F]
Thermal Zero Shift in CTR	<0.5% F.S. /50° C [/100° F]
Thermal Sensitivity Shift in CTR	<1% of reading / 50° C [/100° F]
<b>Over-Range</b>	
Without Damage	1.5 x F.S.
Without Destruction	3 x F.S.
<b>Accuracy</b>	
Linearity	±0.1%F.S.
Hysteresis	±0.1%F.S.

**Electrical Characteristics**

Model	FN3000 <sup>1</sup>	FN3000-A1	FN3000-A2
Supply Voltage	1 to 10Vdc	10 to 30Vdc	±15Vdc (±12 to ±18Vdc)
Sensitivity "FSO" <sup>2</sup>	±2mV/V	±2V ±0.2V	±5V ±0.2V
Zero Offset	±1 mV	2.5V ±0.2V	0V ±0.2V
Input Impedance/Consumption	350 to 700Ω	<50mA	50mA
Output Impedance	350 to 700Ω	1 kΩ <sup>6</sup>	1 kΩ <sup>6</sup>
Insulation under 50Vdc	≥100MΩ	≥100MΩ	≥100MΩ

**Notes**

1. Sensors are calibrated with 10Vdc power supply as standard.
2. Signal goes positive in tension with standard wiring configuration. Other signal output on request
3. Electrical Termination: Connector output including mate
4. Materials: Body in stainless steel or aluminium alloy depending on F.S.; aluminum cover
5. Protection Index: IP50 (other protection levels on request)
6. Output impedance < 100Ω on request
7. CE conformance according to EN 61010-1, EN 50081-1, EN 50082-1

**DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)**

**Wiring Schematic**

**Version -A1**

**Version -A2**

**EH: Hemispherical Load Button**

**Dimensions in mm**

F.S.	J	R
10 KN	12	80
25 KN	12	80
50 KN	12	80
100 KN	20	250
200 KN	20	250
500 KN	30	400
1000 KN	60	400

**FF: Tension pull plate**

**Dimensions in mm [inch]**

Ranges in N [in lbf]	10k [2k]	25k [5k]	50k [10k]	100k [20k]	200k [40k]	500k [100k]	1000k [200k]
A	100 [3.94]			150 [5.91]	195 [7.68]	272 [10.71]	
B	30 [1.18]			40 [1.57]	60 [2.36]	80 [3.15]	
C	34 [1.34]			65 [2.56]	87 [3.43]	120 [4.72]	
D (Thread)	M20x1.5			M32x2	M56x2	M80x3	
E	65 [2.56]			90 [3.54]	106 [4.17]	150 [5.91]	
F	70 [2.76]			100 [3.94]	143 [5.63]	186 [7.32]	
G	45°			30°	22.5°		
H	8x8.2 /Φ85			12x10.4 /Φ125	16x16.2 /Φ169	16x24.5 /Φ229	
I	M8 /Φ85			M10 /Φ125	M16 /Φ169	M24 /Φ229	
Screw-down (m.kg)	2.2	2.5	2.5	5	5	15	50
Screw-down in lbf/ft	15.9	18.1	18.1	36.2	36.2	108.5	361.7


## FN3000

Load Cell Tension and Compression

### OPTIONS

<b>A1</b> : Amplified Tension output with unipolar power supply
<b>A2</b> : Amplified Tension output with bipolar power supply
<b>ET1</b> : CTR -20 to 100° C [-4 to 212° F] OTR = CTR
<b>ET2</b> : CTR -40 to 120° C [-40 to 248° F] OTR = CTR
<b>ET3</b> : CTR -40 to 150° C [-40 to 302° F] OTR = CTR (Note : ET3 not available with A1 and A2 options)
<b>PE</b> : Cable Gland Termination with 2 m [6.5 ft] cable
<b>PE/L00M</b> : Additional cable length with PE option, replace "00" with total length in meters

### ORDERING INFO

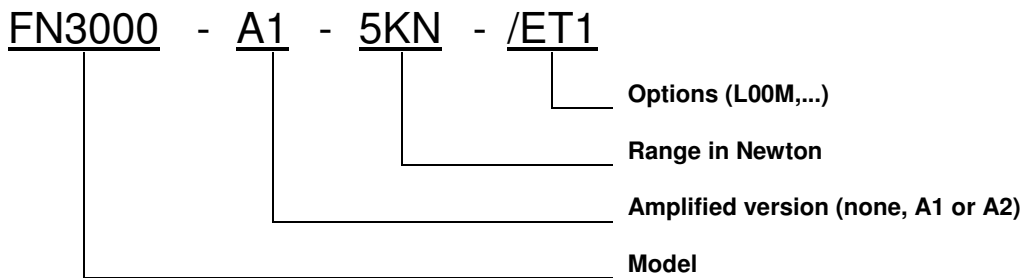

### SUPPLIED ACCESSOIRES

<b>EFMX-7M</b> : mating plug Jaeger 530-272-006 with clamp 530-371-006 for standard and ET1
<b>EFMX-7H</b> : mating plug Jaeger 530-604-006 with clamp 530-693-006 for ET2 or ET3 option

### RECOMMENDED ACCESSORIES

<b>EH</b> : Hemispherical load button
<b>FF</b> : Tension pull plate

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity company  
45738 Northport Loop West  
Fremont, CA 94538  
Tel: +1 800 767 1888  
Fax: +1 510 498 1578  
[customercare.frmt@te.com](mailto:customercare.frmt@te.com)

#### EUROPE

MEAS France SAS,  
a TE Connectivity company  
26 Rue des Dames  
78340 Les Clayes-sous-Bois, France  
Tel: +33 (0) 130 79 33 00  
Fax: +33 (0) 134 81 03 59  
[customercare.lcsb@te.com](mailto:customercare.lcsb@te.com)

#### ASIA

Measurement Specialties (China) Ltd.,  
a TE Connectivity company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North) Nanshan  
District, Shenzhen, 518057  
China  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
[customercare.shzn@te.com](mailto:customercare.shzn@te.com)

[TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.