




Three-phase filter without neutral line.

Filtro rete trifase con o senza neutro

Circuit diagram

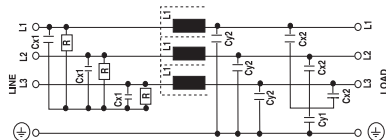

Technical Specifications:

Manufacture

Metal case, internal components sealed with self-extinguishing resin Vo

Connections

Terminal screw

Caratteristiche tecniche:

Costruzione

Custodia metallica, componenti interni sigillati con resina autoestinguente Vo

Terminali

Morsetti a vite


Electrical specifications:

Rated voltage (Vr)	0/480 Vac at 50/60Hz
Rated current (Ir)*	referred to room temp.= 40°C
Leakage current (IL)	≤ 18 mA
Voltage test (2s.)	line to ground 3000 Vdc or 1800 Vac line to line 1700 Vdc
Climatic category	HPF (25/085/21) -25°C to +85°C

Caratteristiche elettriche:

Tensione nominale (Vr)	0/480 Vac a 50/60 Hz
Corrente nominale (Ir)*	riferita ad una temp.di 40°C
Corrente di fuga (IL)	≤ 18 mA
Tensione di prova (2s.)	linea e massa 3000 Vdc o 1800 Vac linea e linea 1700 Vdc
Categoria climatica	HPF (25/085/21) -25°C to +85°C

Code	IR(A)*	Cx1(μF)	Cx2(μF)	Cy1(pF)	Cy2(μF)	L(mH)	R=MΩ	Case
AR280.8A.M	8	2.2	2.2	0.1	0.01	7	0.47	F6
AR280.10A.M	10	3	3	0.1	0.047	4	0.47	F6
AR280.15A.M	15	3	3	0.1	0.047	4	0.47	F13
AR280.20A.M	20	3	3	0.1	0.047	4	0.47	F13
AR280.25A.M	25	4	4	0.1	0.047	4	0.47	F11
AR280.35A.M	35	4	4	0.1	0.047	4	0.47	F7
AR280.50A.M	50	4	4	0.1	0.047	1.5	0.47	F7
AR280.80A.M	80	10	10	0.1	0.047	0.9	0.47	F7
AR280.120A.M	120	10	10	0.1	0.047	0.6	0.47	F40B
AR280.150A.M	150	10	10	0.1	0.047	0.6	0.47	F40B

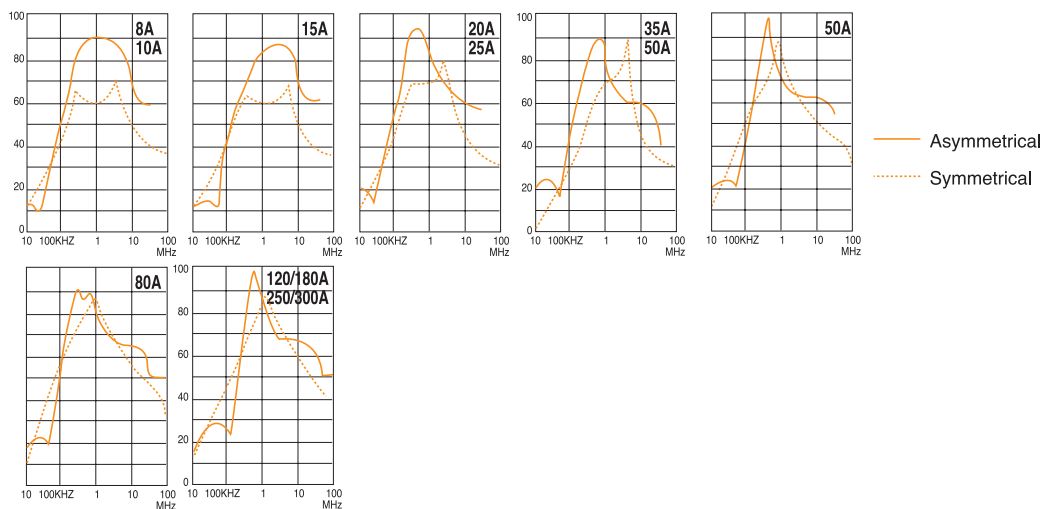

APPROVALS



Dimensions:

See the page Dimensions
 Consultare la pagina Dimensioni