

Bright and Affordable



Automation Machinery



Control Cabinet



Printing Industry



LED Bar Light

CWA

Line up

6500K

IP65



L:900mm

L:600mm

L:300mm




Mounting Brackets



Holding Brackets






Highly-reliable LED chips are used

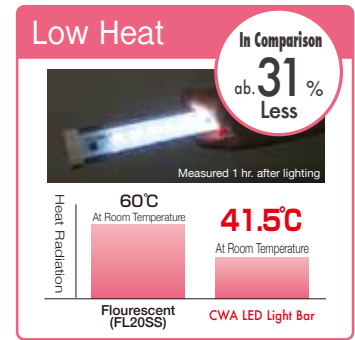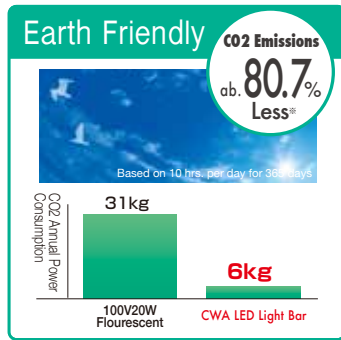

Specifications & Outer Dimensions (Unit: mm)

Model	CWA3S-24-CD	CWA6S-24-CD	CWA9S-24-CD
Luminous Color	Daylight		
Color Temperature (Typ.)	6500K		
Illuminance (at 24V DC, 0.5m)	440lx	800lx	990lx
Total Luminous Flux	350lm	700lm	1050lm
Rated Voltage	24V DC (Polarized)		
Operating Voltage	24V DC ±10%		
Current Consumption	180mA	360mA	540mA
Power Consumption	4.32W	8.64W	12.96W
Operating Temperature Range	-30°C ~ +60°C (RH90% or less, no condensation)		
Main Body Material	Polycarbonate Resin (Waterproof Packing: Silicon)		
Protection Rating	IP65 (Excluding cable ends)		
Mounting Location	Indoor		
Mounting Direction	Any Direction		
Insulation Resistance	500V DC 5MΩ or more		
Withstand Voltage	500V AC for 1 minute (Between power cable lead and screw.)		
Vibration Resistance	30Hz 19.6 m/s ² (Back and Forth, Up and Down, Left and Right for 2 hrs. each)		
Mass	215g ±10%	385g ±10%	540g ±10%



Model Code **CWA3S-24-CD**

Model

Color(CD): Daylight

Rated Voltage(24):24V DC

Light Unit Length:(3):300mm (6):600mm (9):900mm



SCHÖNBUCH ELECTRONIC

Schönbuch Electronic GmbH
Am Anger 8, 82237 Wörthsee

Tel.: +49 8153 90 888 0

FAX: +49 8153 90 888 49

info@schoenbuch-electronic.de

www.schoenbuch-electronic.de



PATLITE ECO PROJECT
For the benefit of mankind and the earth, Patlite is committed to developing environmentally friendly products.

● "PATLITE", or the PATLITE logo are registered trademarks of the PATLITE Corporation.

CAUTION

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.