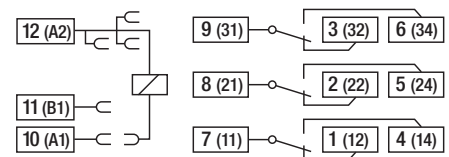
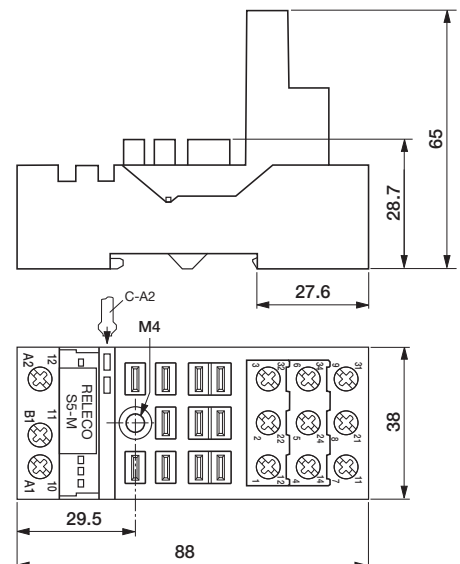


Type:	S5-M 3-pole, 3 level Module slot for timer- and monitoring modules, over voltage suppressing- and LED indicator modules coil bridge bus bar to connect in A2
Rated current	16 A
Specifications	
Rated load	16 A / 400 V
Insulation	Test voltage V_{rms} / 1 min
– All terminal/DIN rail	4 kV
– Terminal/terminal	4 kV
Cross section of connecting wire	
– Single wire	1 x 6 mm ² , 2 x 2,5 mm ²
– Multi wire	1 x 6 mm ² /AWG10, 2 x 1,5 mm ² /AWG16
Max. screw torque	1,2 Nm
Screw dimensions	M3,5, Pozi, slot
Labelling space	detachable
Connection label	1 ... 12, DIN/EN
Mounting	DIN rail TS35 or panel mounting 1 x M4
Ambient temperature operation / storage	-40 (no ice) ... 60° C / -40 ... 80° C

Associated, plug-in 11-pin MRC relays **C5-A, C5-G, C5-X, C5-M, C5-R**

Accessories

Coil bridge bus bar	C-A2
Retaining spring, steel	HF-32

**Connection diagram****Dimensions [mm]****Technical approvals, conformities**



Kühn Controls AG

Notes:

You want more information about this product, please call us: tel: +49 (0)7082-940000 or send us a fax: +49 (0)7082-940001, or email: sales@kuehn-controls.de or visit our Website: www.kuehn-controls.de